

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



23 MAR 2005




(43) International Publication Date  
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number  
**WO 2004/030187 A1**

- (51) International Patent Classification<sup>7</sup>: **H02K 17/30** (74) Agents: HONG, Sung-Pyo et al.; 4F, Edogin Bldg., 827-58, Yeouksam-dong, Kangnam-gu, Seoul 135-080 (KR).
- (21) International Application Number: PCT/KR2003/001968 (81) Designated States (*national*): AU, CA, CN, JP, US.
- (22) International Filing Date: 26 September 2003 (26.09.2003) (84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).
- (25) Filing Language: Korean (26) Publication Language: English Published: — with international search report
- (30) Priority Data:  
10-2002-0059987 27 September 2002 (27.09.2002) KR  
10-2003-0066385 24 September 2003 (24.09.2003) KR
- (71) Applicant and  
(72) Inventor: CHO, Yun-Hyun [KR/KR]; 142-401, LG Metrocity Apt., 173-80, Yongho-dong, Nam-gu, Busan 614-762 (KR).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: A FLAT BOARD TYPE BRUSHLESS DC MOTOR

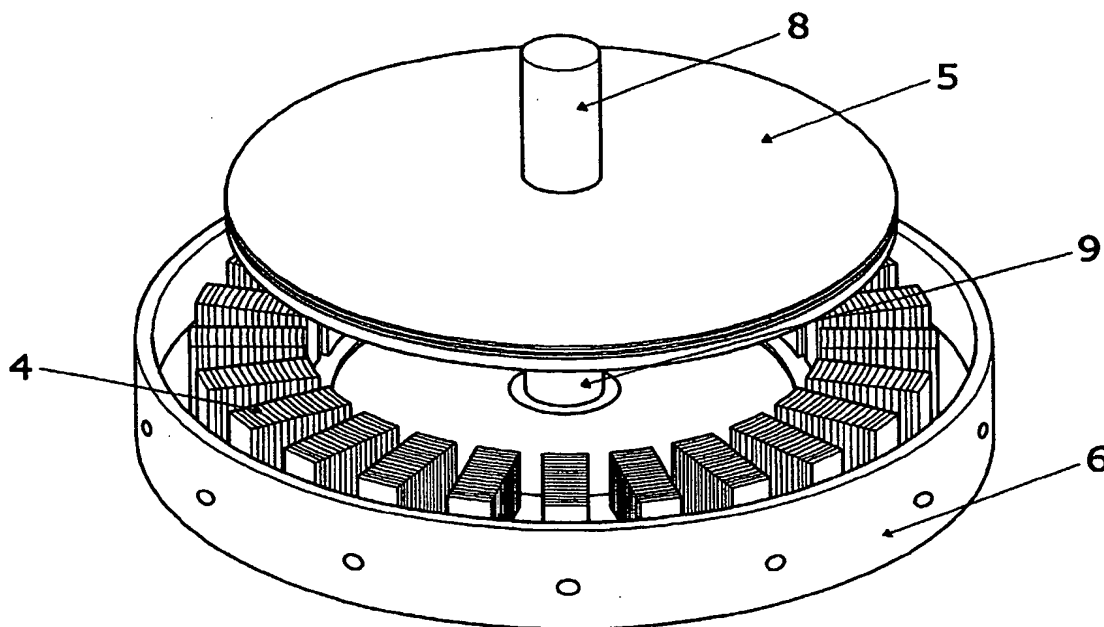

(57) **Abstract:** This invention is related to the flat type motor. The stator core has the laminated flat core structure of a ring type which is slotted a constant distance slot for the install of the teeth core and the winding of the exciting coil on the inner or outer circumference of a stator core circle. The teeth core has a constant thickness which is consisted of a number of teeth core. The rotor against the above stator is consisted of the rotor shaft and the circle flat rotor frame fixed on the motor shaft and is assembled the N- and S- permanent magnet of the even pole number on the circle flat rotor for the flat type brushless and synchronous motor.

WO 2004/030187 A1